



340

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	2
Sound Performance	3
Air Conditioning System	3
Operating Weights and Ground Pressures	3
Major Component Weights	4
Dimensions	5
Working Ranges and Forces	6
Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb)	7
Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb)	12
Bucket Specifications and Compatibility	14
Attachments Offering Guide	16
Standard and Optional Equipment	17
Dealer Installed Kits and Attachments	19
Cab	20

340 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C9.3B	
Net Power		
ISO 9249	258.3 kW	346 hp
ISO 9249 (DIN)	351 hp (metric)	
Engine Power		
ISO 14396	259 kW	347 hp
ISO 14396 (DIN)	352 hp (metric)	
Bore	115 mm	5 in
Stroke	149 mm	6 in
Displacement	9.3 L	568 in ³

- Meets China Nonroad Stage III emission standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
 - Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
 - Net power is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system, and alternator with engine speed at 1,900 rpm.
 - Cat engines are compatible with diesel fuel blended with the following lower-carbon intensity fuels up to:
 - ✓ 100% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels
- Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

*For use of blends higher than 20% biodiesel, consult your Cat dealer.

Swing Mechanism

Swing Speed	8.84 rpm	
Maximum Swing Torque	143 kN·m	105,471 lbf-ft

Weights

Operating Weight	36 800 kg	81,200 lb
------------------	-----------	-----------

- Long Wide Undercarriage, HD Reach Boom, HD R3.2DB (10'6") Stick, GD 2.5 m³ (3.27 yd³) Bucket, 600 mm (24") Triple Grouser Shoes, 7.56 mt (16,700 lb) Counterweight.

Track

Optional Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Optional Track Shoes Width	800 mm	31 in
Number of Shoes (each side)	49	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	4.7 km/h	2.9 mph
Maximum Drawbar Pull	301.5 kN	67,780 lbf

Hydraulic System

Main System – Maximum Flow – Implement	560 L/min (280 × 2 pumps)	148 gal/min (74 × 2 pumps)
Maximum Pressure – Equipment – Implement	35 000 kPa	5,076 psi
Maximum Pressure – Equipment – Lift Mode	38 000 kPa	5,511 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	29 400 kPa	4,264 psi
Boom Cylinder – Bore	150 mm	6 in
Boom Cylinder – Stroke	1440 mm	57 in
Stick Cylinder – Bore	170 mm	7 in
Stick Cylinder – Stroke	1738 mm	68 in
DB Bucket Cylinder – Bore	150 mm	6 in
DB Bucket Cylinder – Stroke	1151 mm	45 in
TB Bucket Cylinder – Bore	160 mm	6 in
TB Bucket Cylinder – Stroke	1356 mm	53 in

Service Refill Capacities

Fuel Tank Capacity	600 L	158.5 gal
Cooling System	40 L	10.5 gal
Engine Oil (with filter)	32 L	8.5 gal
Swing Drive	18 L	4.8 gal
Final Drive (each)	8 L	2.1 gal
Hydraulic System (including tank)	373 L	98.5 gal
Hydraulic Tank (including suction pipe)	161 L	42.5 gal

Standards

Brakes	ISO 10265:2008
Cab/Falling Object Guard System (FOGS)	ISO 10262:1998
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008

340 Hydraulic Excavator Specifications

Sound Performance

ISO 6395 (external)	106 dB(A)
ISO 6396 (inside cab)	73 dB(A)

- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.00 kg of refrigerant, which has a CO₂ equivalent of 1.430 metric tonnes.

Operating Weights and Ground Pressures

	600 mm (24") Triple Grouser Shoes		600 mm (24") Double Grouser Shoes		600 mm (24") Triple Grouser HD Shoes	
	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)
Base Machine Configurations						
Base Frame with HD Track Rollers and Carrier Rollers for Long Wide Undercarriage						
7.56 mt (16,700 lb) Counterweight + Long Wide Undercarriage Base Machine + HD Reach Boom						
HD R3.9 m DB (12'10") Stick, 2.5 m ³ GD (3.27 yd ³) Bucket	37 000 (81,500)	68.9 (10.0)	37 700 (83,200)	70.3 (10.2)	37 600 (83,000)	70.1 (10.2)
HD R3.2 m DB (10'6") Stick, 2.5 m ³ GD (3.27 yd ³) Bucket	36 800 (81,200)	68.6 (9.9)	37 600 (82,800)	70.0 (10.2)	37 500 (82,600)	69.8 (10.1)
7.56 mt (16,700 lb) Counterweight + Long Wide Undercarriage Base Machine + Mass Boom						
M2.55 m TB (8'4") Stick, 2.78 m ³ SDV (3.64 yd ³) Bucket	38 300 (84,500)	71.4 (10.4)	39 100 (86,200)	72.8 (10.6)	39 000 (86,000)	72.7 (10.5)

	700 mm (28") Triple Grouser Shoes		800 mm (31") Triple Grouser Shoes	
	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)
Base Machine Configurations				
Base Frame with HD Track Rollers and Carrier Rollers for Long Wide Undercarriage				
7.56 mt (16,700 lb) Counterweight + Long Wide Undercarriage Base Machine + HD Reach Boom				
HD R3.9 m DB (12'10") Stick, 2.5 m ³ GD (3.27 yd ³) Bucket	37 300 (82,300)	59.6 (8.6)	38 000 (83,800)	53.1 (7.7)
HD R3.2 m DB (10'6") Stick, 2.5 m ³ GD (3.27 yd ³) Bucket	37 200 (81,900)	59.3 (8.6)	37 800 (83,400)	52.8 (7.7)
7.56 mt (16,700 lb) Counterweight + Long Wide Undercarriage Base Machine + Mass Boom				
M2.55 m TB (8'4") Stick, 2.78 m ³ SDV (3.64 yd ³) Bucket	38 700 (85,300)	61.8 (9.0)	39 300 (86,700)	55.0 (8.0)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

340 Hydraulic Excavator Specifications


Major Component Weights

	kg	lb
Base Machine with 7.56 mt (16,700 lb) Counterweight, HD Swing Frame, Base Frame with HD Track Rollers and Carrier Rollers for Long Wide Undercarriage	25 240	55,650
Track Shoes:		
600 mm (24") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes	4090	9,020
700 mm (28") Width, 11 mm (0.43") Thick, Triple Grouser Track Shoes	4450	9,800
800 mm (31") Width, 13 mm (0.51") Thick, Triple Grouser Track Shoes	5100	11,230
Two Boom Cylinders	670	1,470
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	550	1,210
Counterweight:		
7.56 mt (16,700 lb) Counterweight	7560	16,670
Swing Frame:		
HD Swing Frame	3260	7,180
Undercarriage:		
Base Frame with HD Track Rollers and Carrier Rollers	8750	19,290
Booms (including lines, pins, stick cylinder):		
HD Reach Boom 6.5 m (21'4")	3480	7,670
Mass Boom 6.18 m (20'3")	3480	7,670
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
HD Reach Stick R3.2DB (10'6")	1920	4,220
HD Reach Stick R3.9DB (12'10")	2090	4,610
Mass Stick M2.55TB (8'4")	2120	4,680
Buckets (without linkage):		
2.5 m ³ (3.27 yd ³) GD	1540	3,380
2.78 m ³ (3.64 yd ³) SDV	2840	6,270
Quick Coupler.:		
Pin Grabber QC	700	1,550

340 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

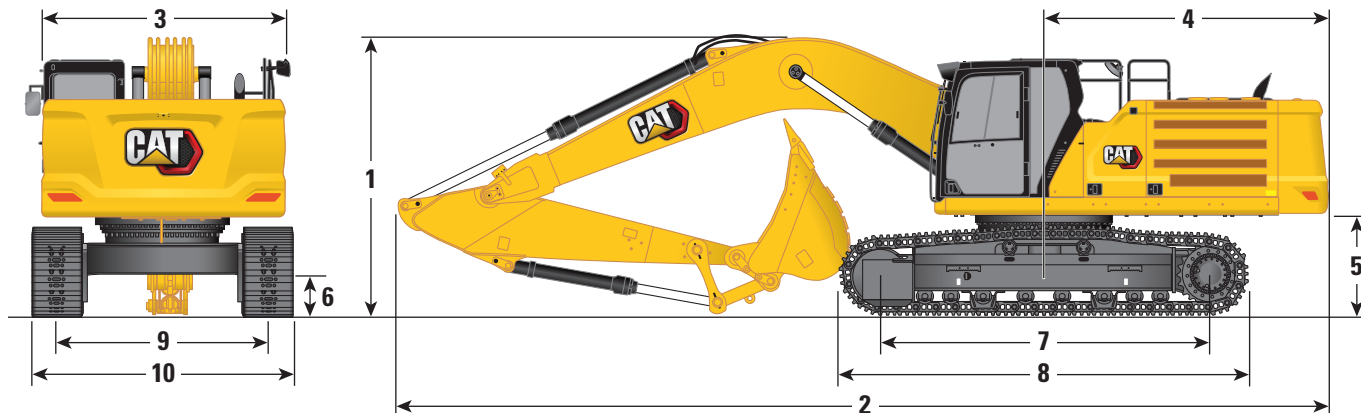


Undercarriage Option	Long Wide Undercarriage					
	Reach Boom 6.5 m (21'4")		Reach Stick		Mass Boom 6.18 m (20'3")	
Boom Options						
Stick Options						
	R3.9DB (12'10")	R3.2DB (10'6")	M2.55TB (8'4")			
1 Machine Height:						
Cab Height	3180 mm	10'5"	3180 mm	10'5"	3180 mm	10'5"
FOGS Height	3330 mm	10'11"	3330 mm	10'11"	3330 mm	10'11"
Guardrails/Handrails Height	3180 mm	10'5"	3180 mm	10'5"	3180 mm	10'5"
With Boom/Stick/Bucket Installed	3660 mm	12'0"	3480 mm	11'5"	3620 mm	11'11"
With Boom/Stick Installed	3560 mm	11'8"	3330 mm	10'11"	3410 mm	11'2"
With Boom Installed	2880 mm	9'5"	2880 mm	9'5"	2830 mm	9'3"
With Boom/Stick/Bucket Installed (with auxiliary lines)	3670 mm	12'0"	3530 mm	11'7"	3630 mm	11'11"
With Boom/Stick Installed (with auxiliary lines)	3620 mm	11'11"	3410 mm	11'2"	3420 mm	11'3"
With Boom Installed (with auxiliary lines)	2970 mm	9'9"	2970 mm	9'9"	2900 mm	9'6"
2 Machine Length:						
With Boom/Stick/Bucket Installed	11 180 mm	36'8"	11 160 mm	36'7"	10 890 mm	35'9"
With Boom/Stick Installed	11 170 mm	36'8"	11 120 mm	36'6"	10 830 mm	35'6"
With Boom Installed	9960 mm	32'8"	9960 mm	32'8"	9640 mm	31'8"
With Boom/Stick/Bucket Installed (with auxiliary lines)	11 180 mm	36'8"	11 160 mm	36'7"	10 890 mm	35'9"
With Boom/Stick Installed (with auxiliary lines)	11 170 mm	36'8"	11 120 mm	36'6"	10 830 mm	35'6"
With Boom Installed (with auxiliary lines)	10 010 mm	32'10"	10 010 mm	32'10"	9640 mm	31'8"
3 Upperframe Width without Walkways	2970 mm	9'9"	2970 mm	9'9"	2970 mm	9'9"
4 Tail Swing Radius	3530 mm	11'7"	3530 mm	11'7"	3530 mm	11'7"
5 Counterweight Clearance	1260 mm	4'2"	1260 mm	4'2"	1260 mm	4'2"
6 Ground Clearance	510 mm	1'8"	510 mm	1'8"	510 mm	1'8"
7 Track Length – Length to Center of Rollers	4040 mm	13'3"	4040 mm	13'3"	4040 mm	13'3"
8 Track Length	5030 mm	16'6"	5030 mm	16'6"	5030 mm	16'6"
9 Track Gauge – Extended	2740 mm	9'0"	2740 mm	9'0"	2740 mm	9'0"
10 Track Width/Undercarriage Width (with steps):						
600 mm (24") Shoes	3340 mm	10'11"	3340 mm	10'11"	3340 mm	10'11"
700 mm (28") Shoes	3440 mm	11'3"	3440 mm	11'3"	3440 mm	11'3"
800 mm (31") Shoes	3540 mm	11'7"	3540 mm	11'7"	3540 mm	11'7"
Bucket Type	GD		GD		SDV	
Bucket Capacity	2.50 m ³	3.27 yd ³	2.50 m ³	3.27 yd ³	2.78 m ³	3.64 yd ³
Bucket Tip Radius	1760 mm	5.8 ft	1760 mm	5.8 ft	1960 mm	6.4 ft

340 Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

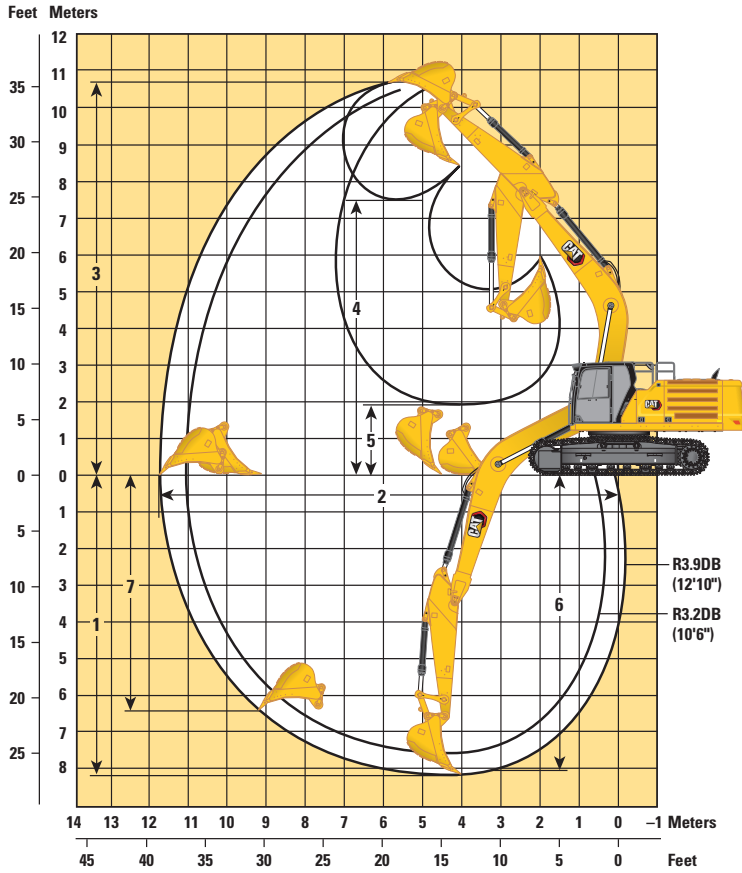

Undercarriage Option

Long Wide Undercarriage

Boom Options

Reach Boom
6.5 m (21'4")

Mass Boom
6.18 m (20'3")

Stick Options

Reach Stick



Mass Stick

	R3.9DB (12'10")		R3.2DB (10'6")		M2.55TB (8'4")	
	mm	ft	mm	ft	mm	ft
1 Maximum Digging Depth	8180	26'10"	7480	24'6"	6700	22'0"
2 Maximum Reach at Ground Line	11 720	38'5"	11 020	36'2"	10 330	33'11"
3 Maximum Cutting Height	10 780	35'4"	10 360	34'0"	10 010	32'10"
4 Maximum Loading Height	7510	24'8"	7120	23'4"	6560	21'6"
5 Minimum Loading Height	1920	6'4"	2620	8'7"	2870	9'5"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	8050	26'5"	7320	24'0"	6540	21'5"
7 Maximum Vertical Wall Digging Depth	6360	20'10"	5550	18'3"	4670	15'4"
Bucket Digging Force (ISO)	209 kN	46,940 lbf	209 kN	46,940 lbf	263 kN	59,210 lbf
Stick Digging Force (ISO)	144 kN	32,360 lbf	165 kN	37,200 lbf	190 kN	42,780 lbf
Bucket Digging Force (ISO) – CAT dig boost	227 kN	50,960 lbf	227 kN	50,960 lbf	286 kN	64,290 lbf
Stick Digging Force (ISO) – CAT dig boost	156 kN	35,130 lbf	180 kN	40,390 lbf	207 kN	46,450 lbf
Bucket Type	GD		GD		SDV	
Bucket Capacity	2.50 m ³	3.27 yd ³	2.50 m ³	3.27 yd ³	2.78 m ³	3.64 yd ³
Bucket Tip Radius	1760 mm	5.8 ft	1760 mm	5.8 ft	1960 mm	6.4 ft

340 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb) – without Bucket

Long Wide Undercarriage



Reach Boom Length	Unit	1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm ft/in	
9000 mm 30'0"	kg lb													*5600 *12,450	*5600 *12,450	7360 23'8"
7500 mm 25'0"	kg lb									*6850 *15,150	*6850 *15,150			*5200 *11,500	*5200 *11,500	8550 27'9"
6000 mm 20'0"	kg lb									*7150 *15,600	*7150 *15,600	*6800 *13,100	6150 *13,100	*5050 *11,100	*5050 *11,100	9340 30'6"
4500 mm 15'0"	kg lb							*8750 *18,950	*8750 *18,950	*7800 *17,000	*7800 *17,000	*7250 *15,900	6050 *12,950	*5050 *11,150	*5050 *11,150	9850 32'2"
3000 mm 10'0"	kg lb					*13 750 *29,600	*13 750 *29,600	*10 400 *22,450	*10 400 *22,450	*8700 *18,850	7750 *16,750	*7700 *16,800	5900 *12,600	*5250 *11,500	4850 *10,700	10 100 33'1"
1500 mm 5'0"	kg lb					*16 550 *35,700	15 550 33,450	*11 900 *25,750	10 250 22,050	*9550 *20,700	7450 16,000	*8200 *17,750	5700 *12,250	*5550 *12,150	4750 *10,450	10 130 33'2"
0 mm 0'0"	kg lb			*7750 *17,600	*7750 *17,600	*18 000 *38,950	14 850 32,000	*12 950 *28,050	9800 21,100	*10 200 *22,100	7200 15,450	8200 *17,600	5550 *11,900	*6050 *13,300	4800 *10,600	9930 32'6"
-1500 mm -5'0"	kg lb	*8100 *18,050	*8100 *18,050	*12 150 *27,450	*12 150 *27,450	*18 200 *39,450	14 600 31,450	*13 350 *28,950	9600 20,600	*10 500 *22,650	7000 15,100	8100 *17,450	5450 *11,750	*6900 *15,200	5100 11,250	9480 31'0"
-3000 mm -10'0"	kg lb	*12 850 *28,800	*12 850 *28,800	*17 750 *40,150	*17 750 *40,150	*17 400 *37,650	14 650 31,450	*13 050 *28,150	9550 20,500	*10 150 *21,900	7000 15,050			*8200 *18,050	5700 *12,600	8760 28'7"
-4500 mm -15'0"	kg lb	*18 500 *41,600	*18 500 *41,600	*21 450 *46,250	*21 450 *46,250	*15 450 *33,300	14 850 31,950	*11 700 *25,100	9650 20,800	*8750 *19,100	7150			*8350 *18,400	6950 15,450	7680 24'11"
-6000 mm -20'0"	kg lb					*11 700 *24,550	*11 700 *24,550	*8200 *18,200	*8200					*8100 *17,750	*8100 *17,750	6040 19'4"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb) – without Bucket

Long Wide Undercarriage



Reach	Unit	1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm ft/in
9000 mm 30'0"	kg lb													*5600 *12,450	*5600 *12,450	7360 23'8"
7500 mm 25'0"	kg lb									*6850 *15,150	*6850 *15,150			*5200 *11,500	*5200 *11,500	8550 27'9"
6000 mm 20'0"	kg lb									*7150 *15,600	*7150 *15,600	*6800 *13,100	6200	*5050 *11,100	*5050 *11,100	9340 30'6"
4500 mm 15'0"	kg lb							*8750 *18,950	*8750 *18,950	*7800 *17,000	*7800 *17,000	*7250 *15,900	6100	*5050 *11,150	*5050 *11,150	9850 32'2"
3000 mm 10'0"	kg lb					*13 750 *29,600	*13 750 *29,600	*10 400 *22,450	*10 400 *22,450	*8700 *18,850	7850 16,850	*7700 *16,800	5950 12,750	*5250 *11,500	4900 10,800	10 100 33'1"
1500 mm 5'0"	kg lb					*16 550 *35,700	15 650 33,750	*11 900 *25,750	10 350 22,250	*9550 *20,700	7500 16,150	*8200 *17,750	5750 12,350	*5550 *12,150	4800 10,550	10 130 33'2"
0 mm 0'0"	kg lb			*7750 *17,600	*7750 *17,600	*18 000 *38,950	15 000 32,250	*12 950 *28,050	9900 21,300	*10 200 *22,100	7250 15,600	8250 17,750	5600 12,050	*6050 *13,300	4850 10,700	9930 32'6"
-1500 mm -5'0"	kg lb	*8100 *18,050	*8100 *18,050	*12 150 *27,450	*12 150 *27,450	*18 200 *39,450	14 750 31,700	*13 350 *28,950	9650 20,800	*10 500 *22,700	7100 15,250	8200 17,600	5500 11,900	*6900 *15,200	5150 11,350	9480 31'0"
-3000 mm -10'0"	kg lb	*12 850 *28,800	*12 850 *28,800	*17 750 *40,150	*17 750 *40,150	*17 400 *37,650	14 750 31,750	*13 050 *28,150	9600 20,700	*10 150 *21,900	7050 15,200			*8200 *18,050	5750 12,700	8760 28'7"
-4500 mm -15'0"	kg lb	*18 500 *41,600	*18 500 *41,600	*21 450 *46,250	*21 450 *46,250	*15 450 *33,300	15 000 32,250	*11 700 *25,100	9750 21,000	*8750	7200			*8350 *18,400	7000 15,600	7680 24'11"
-6000 mm -20'0"	kg lb					*11 700 *24,550	*11 700 *24,550	*8200	*8200					*8100 *17,750	*8100 *17,750	6040 19'4"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.



Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb) – without Bucket

Long Wide Undercarriage



Reach Boom Length	Unit	1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm ft/in	
9000 mm 30'0"	kg lb													*5600 *12,450	*5600 *12,450	7360 23'8"
7500 mm 25'0"	kg lb									*6850 *15,150	*6850 *15,150			*5200 *11,500	*5200 *11,500	8550 27'9"
6000 mm 20'0"	kg lb									*7150 *15,600	*7150 *15,600	*6800 *13,100	6300	*5050 *11,100	*5050 *11,100	9340 30'6"
4500 mm 15'0"	kg lb							*8750 *18,950	*8750 *18,950	*7800 *17,000	*7800 *17,000	*7250 *15,900	6200 13,300	*5050 *11,150	*5050 *11,150	9850 32'2"
3000 mm 10'0"	kg lb					*13 750 *29,600	*13 750 *29,600	*10 400 *22,450	*10 400 *22,450	*8700 *18,850	7950 17,150	*7700 *16,800	6000 12,950	*5250 *11,500	5000 11,000	10 100 33'1"
1500 mm 5'0"	kg lb					*16 550 *35,700	15 900 34,250	*11 900 *25,750	10 500 22,600	*9550 *20,700	7650 16,400	*8200 *17,750	5850 12,550	*5550 *12,150	4900 10,750	10 130 33'2"
0 mm 0'0"	kg lb			*7750 *17,600	*7750 *17,600	*18 000 *38,950	15 250 32,800	*12 950 *28,050	10 050 21,650	*10 200 *22,100	7350 15,850	8400 18,100	5700 12,250	*6050 *13,300	4950 10,900	9930 32'6"
-1500 mm -5'0"	kg lb	*8100 *18,050	*8100 *18,050	*12 150 *27,450	*12 150 *27,450	*18 200 *39,450	15 000 32,200	*13 350 *28,950	9800 21,150	*10 500 *22,700	7200 15,500	8300 17,900	5600 12,100	*6900 *15,200	5250 11,550	9480 31'0"
-3000 mm -10'0"	kg lb	*12 850 *28,800	*12 850 *28,800	*17 750 *40,150	*17 750 *40,150	*17 400 *37,650	15 000 32,250	*13 050 *28,150	9750 21,050	*10 150 *21,900	7150 15,450			*8200 *18,050	5850 12,950	8760 28'7"
-4500 mm -15'0"	kg lb	*18 500 *41,600	*18 500 *41,600	*21 450 *46,250	*21 450 *46,250	*15 450 *33,300	15 250 32,750	*11 700 *25,100	9900 21,350	*8750	7300			*8350 *18,400	7100 15,850	7680 24'11"
-6000 mm -20'0"	kg lb					*11 700 *24,550	*11 700 *24,550	*8200	*8200					*8100 *17,750	*8100 *17,750	6040 19'4"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.



Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb) – without Bucket




Long Wide Undercarriage



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
7500 mm 25'0"	kg lb							*7850 *14,900	*7850 *14,900			*6700 *14,800	*6700 *14,800	7720 25'0"
6000 mm 20'0"	kg lb							*7950 *17,400	*7950 *17,400			*6500 *14,350	*6500 *14,350	8590 28'0"
4500 mm 15'0"	kg lb			*12 200 *26,200	*12 200 *26,200	*9800 *21,150	*9800 *21,150	*8550 *18,600	8000 17,250	*7750	6000	*6550 *14,400	5850 12,900	9140 29'10"
3000 mm 10'0"	kg lb			*15 400 *33,100	*15 400 *33,100	*11 300 *24,450	10 700 23,000	*9350 *20,250	7700 16,600	*8250 *17,950	5850 12,600	*6800 *15,000	5450 12,050	9410 30'10"
1500 mm 5'0"	kg lb			*17 700 *38,200	15 300 32,900	*12 650 *27,300	10 150 21,900	*10 100 *21,850	7450 16,000	8350 18,000	5700 12,300	*7300 *16,050	5350 11,750	9440 30'11"
0 mm 0'0"	kg lb			*18 450 *39,950	14 850 31,950	*13 400 *29,000	9800 21,150	*10 550 *22,850	7200 15,550	8250 17,750	5600 12,100	8000 17,550	5450 11,950	9220 30'2"
-1500 mm -5'0"	kg lb	*13 300 *30,100	*13 300 *30,100	*18 050 *39,150	14 800 31,750	*13 450 *29,150	9700 20,850	*10 600 *22,850	7100 15,350			8600 18,900	5800 12,800	8740 28'7"
-3000 mm -10'0"	kg lb	*21 000 *47,550	*21 000 *47,550	*16 700 *36,200	14 900 32,000	*12 700 *27,450	9700 20,900	*9800 *21,050	7150 15,450			*9000 *19,800	6650 14,750	7950 25'11"
-4500 mm -15'0"	kg lb	*18 700 *40,300	*18 700 *40,300	*14 100 *30,300	*14 100 *30,300	*10 650 *22,700	9950 21,450					*9000 *19,800	8500 19,100	6740 21'10"

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb) – without Bucket

Long Wide Undercarriage



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
7500 mm 25'0"	kg lb							*7850 *14,900	*7850 *14,900			*6700 *14,800	*6700 *14,800	7720 25'0"
6000 mm 20'0"	kg lb							*7950 *17,400	*7950 *17,400			*6500 *14,350	*6500 *14,350	8590 28'0"
4500 mm 15'0"	kg lb			*12 200 *26,200	*12 200 *26,200	*9800 *21,150	*9800 *21,150	*8550 *18,600	8100 17,400	*7750	6050	*6550 *14,400	5900 13,050	9140 29'10"
3000 mm 10'0"	kg lb			*15 400 *33,100	*15 400 *33,100	*11 300 *24,450	10 750 23,200	*9350 *20,250	7800 16,750	*8250 *17,950	5900 12,700	*6800 *15,000	5500 12,150	9410 30'10"
1500 mm 5'0"	kg lb			*17 700 *38,200	15 400 33,200	*12 650 *27,300	10 250 22,050	*10 100 *21,850	7500 16,150	8450 18,150	5750 12,400	*7300 *16,050	5400 11,850	9440 30'11"
0 mm 0'0"	kg lb			*18 450 *39,950	15 000 32,250	*13 400 *29,000	9900 21,350	*10 550 *22,850	7300 15,700	8350 17,950	5650 12,200	8050 17,750	5500 12,050	9220 30'2"
-1500 mm -5'0"	kg lb	*13 300 *30,100	*13 300 *30,100	*18 050 *39,150	14 900 32,050	*13 450 *29,150	9750 21,000	*10 600 *22,850	7200 15,500			8650 19,100	5850 12,950	8740 28'7"
-3000 mm -10'0"	kg lb	*21 000 *47,550	*21 000 *47,550	*16 700 *36,200	15 050 32,300	*12 700 *27,450	9800 21,100	*9800 *21,050	7250 15,600			*9000 *19,800	6700 14,850	7950 25'11"
-4500 mm -15'0"	kg lb	*18 700 *40,300	*18 700 *40,300	*14 100 *30,300	*14 100 *30,300	*10 650 *22,700	10 050 21,650					*9000 *19,800	8600 19,250	6740 21'10"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.



Lift capacity stays with ±5% for all available track shoes.















Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb) – without Bucket

Long Wide Undercarriage



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"				mm ft/in
														
7500 mm 25'0"	kg lb							*7850 *14,900	*7850 *14,900			*6700 *14,800	*6700 *14,800	7720 25'0"
6000 mm 20'0"	kg lb							*7950 *17,400	*7950 *17,400			*6500 *14,350	*6500 *14,350	8590 28'0"
4500 mm 15'0"	kg lb			*12 200 *26,200	*12 200 *26,200	*9800 *21,150	*9800 *21,150	*8550 *18,600	8200 17,650	*7750	6150	*6550 *14,400	6000 13,250	9140 29'10"
3000 mm 10'0"	kg lb			*15 400 *33,100	*15 400 *33,100	*11 300 *24,450	10 900 23,550	*9350 *20,250	7900 17,000	*8250 *17,950	6000 12,900	*6800 *15,000	5600 12,350	9410 30'10"
1500 mm 5'0"	kg lb			*17 700 *38,200	15 650 33,700	*12 650 *27,300	10 400 22,400	*10 100 *21,850	7600 16,400	*8600 18,450	5850 12,600	*7300 *16,050	5450 12,050	9440 30'11"
0 mm 0'0"	kg lb			*18 450 *39,950	15 250 32,750	*13 400 *29,000	10 050 21,650	*10 550 *22,850	7400 15,950	8450 18,250	5750 12,400	*8100 *17,850	5600 12,250	9220 30'2"
-1500 mm -5'0"	kg lb	*13 300 *30,100	*13 300 *30,100	*18 050 *39,150	15 150 32,550	*13 450 *29,150	9900 21,350	*10 600 *22,850	7300 15,750			*8750 *19,300	5950 13,150	8740 28'7"
-3000 mm -10'0"	kg lb	*21 000 *47,550	*21 000 *47,550	*16 700 *36,200	15 250 32,800	*12 700 *27,450	9950 21,450	*9800 *21,050	7350 15,850			*9000 *19,800	6850 15,100	7950 25'11"
-4500 mm -15'0"	kg lb	*18 700 *40,300	*18 700 *40,300	*14 100 *30,300	*14 100 *30,300	*10 650 *22,700	10 200 22,000					*9000 *19,800	8750 19,550	6740 21'10"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb) – without Bucket




Long Wide Undercarriage



Boom Length mm ft/in	kg lb	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		mm ft/in		
7500 mm 25'0"	kg lb					*9200 *20,250	*9200 *20,250			*8200 *18,200	*8200 *18,200	6600 21'3"
6000 mm 20'0"	kg lb					*9500 *20,700	*9500 *20,700	*8950	7900	*7850 *17,250	7700 17,200	7600 24'9"
4500 mm 15'0"	kg lb			*13 300 *28,600	*13 300 *28,600	*10 550 *22,850	*10 550 *22,850	*9250 *20,100	7750 16,650	*7850 *17,200	6700 14,750	8220 26'10"
3000 mm 10'0"	kg lb			*16 300 *35,000	15 800 34,100	*11 900 *25,700	10 400 22,400	*9800 *21,300	7500 16,100	*8150 *17,850	6150 13,600	8520 27'11"
1500 mm 5'0"	kg lb			*18 050 *39,000	14 950 32,250	*12 950 *28,050	9900 21,350	*10 350 *22,450	7250 15,600	*8750 *19,250	6000 13,200	8550 28'0"
0 mm 0'0"	kg lb			*18 250 *39,500	14 700 31,600	*13 400 *29,050	9650 20,800	*10 550 *22,800	7100 15,250	9150 20,150	6150 13,550	8310 27'3"
-1500 mm -5'0"	kg lb	*16 900 *38,400	*16 900 *38,400	*17 300 *37,500	14 700 31,600	*13 050 *28,250	9600 20,650	*10 050 *21,600	7050 15,250	*9550 *21,000	6750 14,900	7770 25'5"
-3000 mm -10'0"	kg lb	*19 750 *42,850	*19 750 *42,850	*15 200 *32,850	14 950 32,100	*11 550 *24,800	9700 20,950			*9500 *20,950	8100 18,050	6870 22'4"
-4500 mm -15'0"	kg lb			*11 050 *23,350	*11 050 *23,350					*8800 *19,150	*8800 *19,150	5410 17'5"

Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb) – without Bucket

Long Wide Undercarriage



Boom Length mm ft/in	kg lb	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		mm ft/in		
7500 mm 25'0"	kg lb					*9200 *20,250	*9200 *20,250			*8200 *18,200	*8200 *18,200	6600 21'3"
6000 mm 20'0"	kg lb					*9500 *20,700	*9500 *20,700	*8950	7950	*7850 *17,250	7800 *17,250	7600 24'9"
4500 mm 15'0"	kg lb			*13 300 *28,600	*13 300 *28,600	*10 550 *22,850	*10 550 *22,850	*9250 *20,100	7800 16,800	*7850 *17,200	6750 14,900	8220 26'10"
3000 mm 10'0"	kg lb			*16 300 *35,000	15 950 34,400	*11 900 *25,700	10 500 22,600	*9800 *21,300	7550 16,250	*8150 *17,850	6200 13,700	8520 27'11"
1500 mm 5'0"	kg lb			*18 050 *39,000	15 100 32,500	*12 950 *28,050	10 000 21,550	*10 350 *22,450	7300 15,750	*8750 *19,250	6050 13,350	8550 28'0"
0 mm 0'0"	kg lb			*18 250 *39,500	14 800 31,850	*13 400 *29,050	9750 20,950	*10 550 *22,800	7150 15,400	9250 20,350	6250 13,700	8310 27'3"
-1500 mm -5'0"	kg lb	*16 900 *38,400	*16 900 *38,400	*17 300 *37,500	14 850 31,850	*13 050 *28,250	9650 20,800	*10 050 *21,600	7150 15,400	*9550 *21,000	6800 15,050	7770 25'5"
-3000 mm -10'0"	kg lb	*19 750 *42,850	*19 750 *42,850	*15 200 *32,850	15 050 32,350	*11 550 *24,800	9800 21,150			*9500 *20,950	8200 18,200	6870 22'4"
-4500 mm -15'0"	kg lb			*11 050 *23,350	*11 050 *23,350					*8800 *19,150	*8800 *19,150	5410 17'5"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.



Lift capacity stays with ±5% for all available track shoes.













Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 7.56 mt (16,700 lb) – without Bucket

Long Wide Undercarriage



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"				mm ft/in
												
7500 mm 25'0"	kg lb					*9200 *20,250	*9200 *20,250			*8200 *18,200	*8200 *18,200	6600 21'3"
6000 mm 20'0"	kg lb					*9500 *20,700	*9500 *20,700	*8950	8100	*7850 *17,250	*7850 *17,250	7600 24'9"
4500 mm 15'0"	kg lb			*13 300 *28,600	*13 300 *28,600	*10 550 *22,850	*10 550 *22,850	*9250 *20,100	7950 17,050	*7850 *17,200	*7850 *17,200	8220 26'10"
3000 mm 10'0"	kg lb			*16 300 *35,000	16 200 34,900	*11 900 *25,700	10 650 22,900	*9800 *21,300	7650 16,500	*8150 *17,850	6300 13,900	8520 27'11"
1500 mm 5'0"	kg lb			*18 050 *39,000	15 350 33,000	*12 950 *28,050	10 150 21,900	*10 350 *22,450	7450 16,000	*8750 *19,250	6150 13,550	8550 28'0"
0 mm 0'0"	kg lb			*18 250 *39,500	15 050 32,350	*13 400 *29,050	9900 21,300	*10 550 *22,800	7250 15,650	*9350 *20,600	6350 13,950	8310 27'3"
-1500 mm -5'0"	kg lb	*16 900 *38,400	*16 900 *38,400	*17 300 *37,500	15 050 32,350	*13 050 *28,250	9850 21,150	*10 050 *21,600	7250 15,650	*9550 *21,000	6950 15,300	7770 25'5"
-3000 mm -10'0"	kg lb	*19 750 *42,850	*19 750 *42,850	*15 200 *32,850	*15 200 *32,850	*11 550 *24,800	9950 21,500			*9500 *20,950	8350 18,500	6870 22'4"
-4500 mm -15'0"	kg lb			*11 050 *23,350	*11 050 *23,350					*8800 *19,150	*8800 *19,150	5410 17'5"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

340 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility

	Linkage	Width		Capacity		Weight		Fill %	Long Wide Undercarriage 7.56 mt (17,000 lb) Counterweight		
		mm	in	m ³	yd ³	kg	lb		Reach HD		Mass M2.55 (8'4")
									R3.2 (10'6") HD	R3.9 (12'10") HD	
Pin-On (No Quick Coupler)											
Heavy Duty	DB	1500	61	1.88	2.46	1620	3,571	100	●	⊙	
	DB	1550	61	1.88	2.46	1632	3,594	100	●	⊙	
	DB	1650	67	2.12	2.77	1718	3,787	100	⊙	⊖	
	DB	1700	67	2.12	2.77	1726	3,801	100	⊙	⊖	
	DB	1800	73	2.36	3.08	1783	3,926	100	⊖	○	
	DB	1650	65	2.41	3.15	1800	3,964	100	⊖	○	
	DB	1700	67	2.20	2.88	1794	3,951	100	⊙	⊖	
	DB	1750	69	2.60	3.40	1932	4,255	100	⊖	○	
General Duty	TB	1800	71	2.60	3.40	2282	5,025	100			⊙
	TB	2050	81	3.00	3.92	2492	5,488	100			○
Heavy Duty	TB	1750	69	2.50	3.27	2420	5,329	100			⊙
	TB	1850	73	2.69	3.52	2639	5,811	100			⊖
	TB	1900	75	2.80	3.66	2548	5,612	100			⊖
Severe Duty	TB	1600	63	2.20	2.88	2390	5,268	90			●
	TB	1750	69	2.60	3.40	2430	5,352	90			⊙
	TB	1800	71	2.60	3.40	2618	5,766	90			⊙
Severe Duty – V Edge	TB	1650	66	2.41	3.15	2367	5,218	90			●
	TB	1900	75	2.80	3.66	2601	5,728	90			⊖
Maximum load with pin-on (payload + bucket)								kg	5780	5040	6730
								lb	12,743	11,111	14,837

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

(continued on next page)

340 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility (continued)

	Linkage	Width		Capacity		Weight		Fill %	Long Wide Undercarriage 7.56 mt (17,000 lb) Counterweight		
		mm	in	m ³	yd ³	kg	lb		Reach HD		Mass M2.55 (8'4")
									R3.2 (10'6") HD	R3.9 (12'10") HD	
With Cat Pin Grabber Coupler											
Heavy Duty	DB	1500	61	1.88	2.46	1620	3,571	100	⊙	⊖	
	DB	1550	61	1.88	2.46	1632	3,594	100	⊙	⊖	
	DB	1650	67	2.12	2.77	1718	3,787	100	⊖	○	
	DB	1700	67	2.12	2.77	1726	3,801	100	⊖	○	
	DB	1800	73	2.36	3.08	1783	3,926	100	○	◇	
	DB	1650	65	2.41	3.15	1800	3,964	100	○	◇	
	DB	1700	67	2.20	2.88	1794	3,951	100	⊖	○	
	DB	1750	69	2.60	3.40	1932	4,255	100	○	◇	
General Duty	TB	1800	71	2.60	3.40	2282	5,025	100			○
	TB	2050	81	3.00	3.92	2492	5,488	100			◇
Heavy Duty	TB	1750	69	2.50	3.27	2420	5,329	100			○
	TB	1850	73	2.69	3.52	2639	5,811	100			◇
	TB	1900	75	2.80	3.66	2548	5,612	100			◇
Severe Duty	TB	1600	63	2.20	2.88	2390	5,268	90			⊖
	TB	1750	69	2.60	3.40	2430	5,352	90			○
	TB	1800	71	2.60	3.40	2618	5,766	90			○
Severe Duty – V Edge	TB	1650	66	2.41	3.15	2367	5,218	90			⊖
	TB	1900	75	2.80	3.66	2601	5,728	90			○
Maximum load with coupler (payload + bucket)								kg	5082	4342	5677
								lb	11,205	9,573	12,515

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

340 Hydraulic Excavator Specifications

Attachments Offering Guide

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

No Match

PIN-ON ATTACHMENTS

Undercarriage		Long Wide		
Counterweight		7.56 mt (17,000 lb)		
Boom Type		Reach HD		ME
Stick Length		3.2 m (10'6") HD	3.9 m (12'10") HD	2.55 m (8'4")
Hydraulic Hammers	H140 GC	✓	✓	✓
	H140 GC S	✓	✓	✓
	H140 S	✓	✓	✓
	H160 GC	✓	✓	✓
	H160 GC S	✓	✓	✓
	H160 S	✓	✓	✓
	H180 GC	✓		✓
	H180 GC S	✓	✓	✓
	H180 S	✓	✓	✓
Compactors (Vibratory Plate)	CVP110	✓	✓	✓

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS, STICKS AND LINKAGES			ELECTRICAL SYSTEM		
6.18 m (20'3") Mass boom		✓	Maintenance-free 1,000 CCA batteries (×2)	✓	
6.5 m (21'4") HD Reach boom		✓	Maintenance-free 1,000 CCA batteries (×4)		✓
2.55 m (8'4") Mass stick		✓	Centralized electrical disconnect switch	✓	
3.2 m (10'6") HD Reach stick		✓	LED exterior chassis and boom lights	✓	
3.9 m (12'10") HD Reach stick		✓	Premium surround working lights		✓
TB family bucket linkage with lifting eye		✓	ENGINE		
DB family bucket linkage with lifting eye		✓	115 Amp alternator	✓	
CAT TECHNOLOGY			Three selectable modes: Power, Smart, Eco	✓	
Cat Product Link™	✓		Auto engine speed control	✓	
Remote flash	✓		52° C (126° F) high-ambient cooling		✓
Remote troubleshoot	✓		Hydraulic reverse fan		✓
Cat Grade connectivity		✓	-18° C (0° F) cold start capability	✓	
Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓		-32° C (-25° F) cold start capability		✓
Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓		Double element air filter with integrated pre-cleaner	✓	
Cat Grade with 2D and offset memory		✓	Dual stage four micron main filter	✓	
Cat Grade with Advanced 2D		✓	10 micron primary filter with water separator	✓	
Cat Grade with 3D single GNSS		✓	Electric fuel priming pump	✓	
Cat Grade with 3D dual GNSS		✓	Secure start with PIN code	✓	
Cat Assist:		✓	Remote disable	✓	
– Grade Assist			HYDRAULIC SYSTEM		
– Boom Assist			Boom and stick regeneration circuit	✓	
– Bucket Assist			Electronic main control valve	✓	
– Swing Assist			Auto dig boost		✓
– Lift Assist			Auto heavy lift		✓
Cat Payload:		✓	Auto hydraulic oil warmup	✓	
– Static weigh			Bio hydraulic oil capability	✓	
– Semiauto calibration			Reverse swing damping valve	✓	
– Payload/cycle information			Auto swing parking brake	✓	
– USB reporting capability			High performance hydraulic return filter	✓	
2D E-Fence:		✓	Two speed travel	✓	
– E-ceiling			Single one-way circuit		✓
– E-floor			Combined two-way circuit with hammer return filter		✓
– E-swing			Quick coupler circuit for Cat Pin Grabber		✓
– E-wall					
– E-cab avoidance					
Auto hammer stop	✓				
Laser catcher		✓			
Work tool recognition		✓			
Work tool tracking*		✓			

(continued on next page)

*Requires PL161 attachment locator on work tool and Bluetooth® receiver on machine.

340 Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
SAFETY AND SECURITY			UNDERCARRIAGE AND STRUCTURES		
Cat Detect – People Detection		✓	Long wide undercarriage	✓	
Caterpillar One Key security system	✓		Towing eye on base frame	✓	
Lockable external tool/storage box	✓		Full-length track guiding guards		✓
Lockable door, fuel, and hydraulic tank locks	✓		Segmented two-piece track guiding guards		✓
Lockable fuel drain compartment	✓		Swivel guard	✓	
Service platform with anti-skid plate and recessed bolts	✓		HD bottom guard	✓	
RH handrail and handhold	✓		HD travel motor guards	✓	
Signaling/warning horn	✓		Grease lubricated track	✓	
Travel alarm		✓	7.56 mt (16,700 lb) counterweight	✓	
Swing alarm		✓	600 mm (24") triple grouser track shoes		✓
Ground-level secondary engine shutoff switch	✓		700 mm (28") triple grouser track shoes		✓
Rearview camera	✓		800 mm (31") triple grouser track shoes		✓
Falling object guard system		✓			
Inspection lighting		✓			
SERVICE AND MAINTENANCE					
Integrated vehicle health management system		✓			
Grouped engine oil and fuel filters	✓				
Scheduled Oil Sampling (S·O·S SM) ports	✓				
QuickEvac TM maintenance ready		✓			

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB <ul style="list-style-type: none">• Lower radial wiper• LH/RH electrical pedal for tool control• Dual exit rear window• Rain protector for front windshield and cab light cover• Polycarbonate roof hatch	ELECTRICAL <ul style="list-style-type: none">• Premium surround working lights GUARDS <ul style="list-style-type: none">• Mesh guard full front• Mesh guard half front• Full protecting vandalism guard	SAFETY AND SECURITY <ul style="list-style-type: none">• Bluetooth® receiver kit• Bluetooth key fob• Falling object guard system
--	--	--

340 Cab

ROPS	○
High-resolution 203 mm (8") LCD touchscreen monitor	●
High-resolution 254 mm (10") LCD touchscreen monitor	○
Auto bi-level air conditioner	●
Keyless push-to-start engine control	●
Air-suspension seat	●
51 mm (2") seat belt	●
Bluetooth radio with USB/Aux ports	●
24V DC outlet	●
Beverage holder	●
Openable two-piece front window	●
Rear window emergency exit	●
Radial wiper with washer	●
Openable steel hatch	●
LED dome light	●
Roller front sunscreen	●
Roller rear sunscreen	○
Washable floor mat	●

● Standard

○ Optional

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2022 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ3388-02 (11-2022)
Replaces AEXQ3388-01
Build Number: 08B
(SE Asia)

